

DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, Cat.7 raw cable TPE superflex — Art.-No. K5525Fxx.x

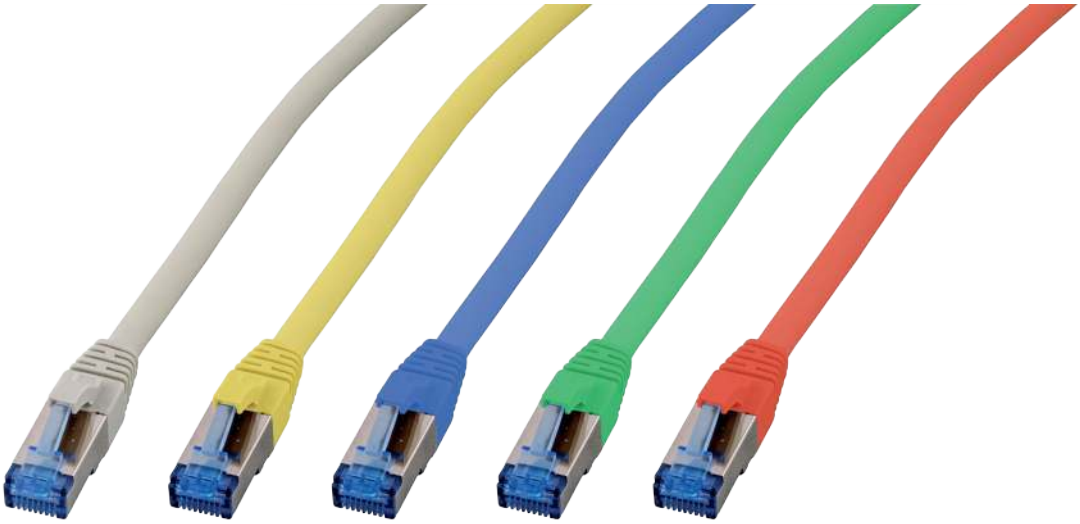

Features

- S/FTP Cat.6A 4x2xAWG26/7 TPE
- Outer diameter 6,5mm
- Flame retardant acc. to IEC-60332-1
- Halogen free and Silicon free
- Length imprinted on boot
- Contacts gold-plated

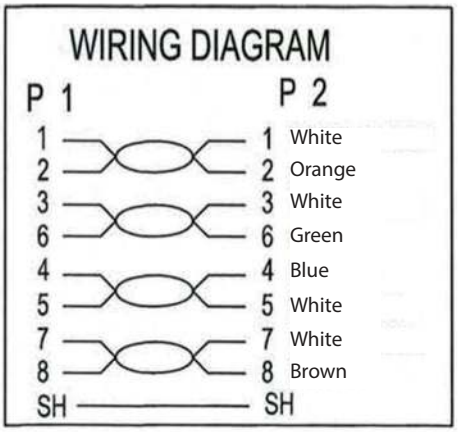


Art.No.	K5525Fxx.x	File	K5525Fxx.x.indd		
Description	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 raw cable TPE superflex				
Created	Date	Last revision	Date	Proved	Date
JB	22.02.2018	JB	22.02.2018	JB	22.02.2018

EFB Elektronik GmbH | Striegauer Str. 1 | 33719 Bielefeld | www.efb-elektronik.de
fon +49(0)521/40418-0 | fax +49(0)521/40418-50 | info@efb-elektronik.de

DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, Cat.7 raw cable TPE superflex — Art.-No. K5525Fxx.x

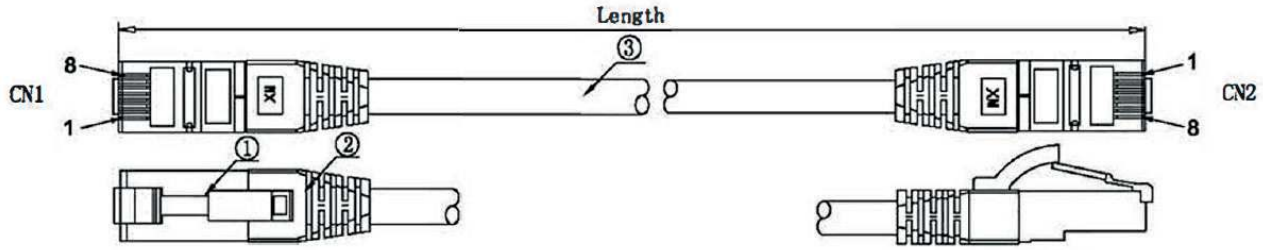

Specification

No.	Type	Description
a	Connector	RJ45 plug shielded and gold plated contacts
b	Boot	Length imprinted, moulded
c	Cable	S/FTP Cat.6A 4x2xAWG26/7 TPE Outer diameter 6.5mm, Bending radius : 5 x outer diameter Jacket: Flame retardant acc. to IEC 60332-1, halogen free and silicon free Printing: Cat.6A Patchcord Superflex S/FTP 4x2xAWG26/7 rawcable Cat.7 TPE LSZH ISO/IEC11801 ANSI/TIA-568-C.2***Gigabit Ethernet***

Order Data

RJ45 Patch cable S/FTP, Cat.6A, Cat.7 raw cable TPE superflex

K5525GR.x	grey	K5525FGE.x	yellow	K5525FRT.x	red
K5525FBL.x	blue	K5525FGN.x	green	K5525FSW.x	black

Available lengths in meters:
1,0 - 2,0 - 3,0 - 5,0 - 7,5 - 10,0 - 15,0 - 20,0 - 25,0 - 30,0

RoHS compliant

Art.No.	K5525Fxx.x	File	K5525Fxx.x.indd		
Description	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 raw cable TPE superflex				
Created	Date	Last revision	Date	Proved	Date
JB	22.02.2018	JB	22.02.2018	JB	22.02.2018